




Ralspeed Soft Starter System

TQM2KC-56

18.5KW TO 55/56KW

SOFT START

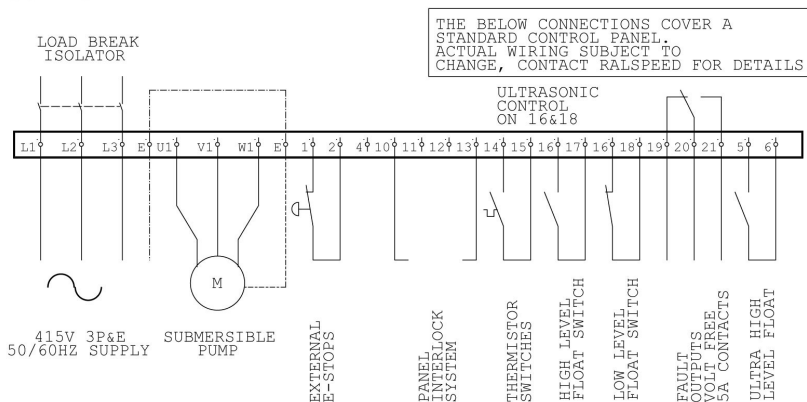

INTERNAL FEATURES

- RALSPEED SOFT START UNIT
- MAIN CONTACTOR
- BYPASS CONTACTOR
- EARTH LEAKAGE PROTECTION
- CONTROL TERMINALS
- MOTOR TERMINALS
- TRANSFORMER
- MAINS TERMINALS
- PRE-DRILLED GLAND PLATE
- MOTOTR OVERHEAT PROTECTION
- PROVISION FOR RAL-TXT CONNECTION
- EXTERNAL E/STOP FACILITY
- 1000 EVENT DATA LOGGER

EXTERNAL FEATURES

- CONTROLS AND PROTECTS FROM 18.5KW TO 56KW
- FOR INTERNAL AND EXTERNAL APPLICATIONS
- LIFTING HOOK
- RAIN CANOPY
- FLOAT SWITCH OR ULTRASONIC LEVEL CONTROL
- 2 LINE LCD DIGITAL DISPLAY
- LOCAL/ REMOTE SELECTOR SWITCH
- EMERGENCY STOP PUSHBUTTON
- ISOLATOR
- RUST RESISTANT PANEL
- RIGID FREE STANDING FRAME

